




Evcharge Cloud



USER MANUAL

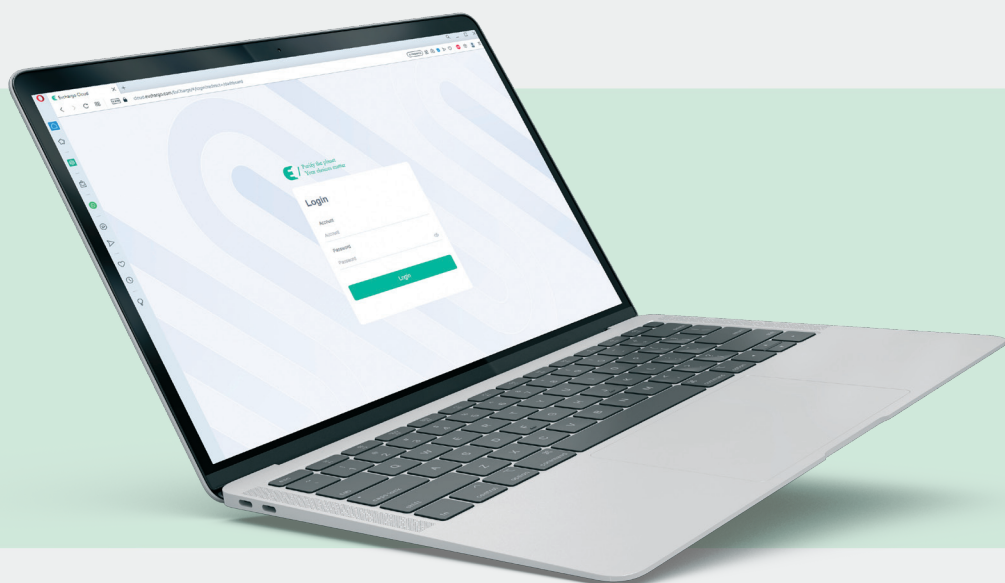

Evcharge Cloud is a smart platform that enables efficient management of your charging points and stations, providing you with valuable insights and control.

2. Purpose of this manual

The purpose of this manual is to offer comprehensive guidance on how to effectively utilize the Evcharge Cloud for managing charge points and stations. It is designed to assist users in navigating through the platform's features with ease.

3. Getting started

3.1 Login

After purchasing our charge point, you will receive an email with an account to access the Evcharge Cloud platform. To log into the platform, navigate to <https://cloud.evcharge.com> and enter your account and password.



The account offered to you is an Administrator account, and after logging into the platform with this account, you can create other accounts and give them different levels of permissions by assigning roles. The accounts you create can also be logged into the platform, but with different functional permissions.

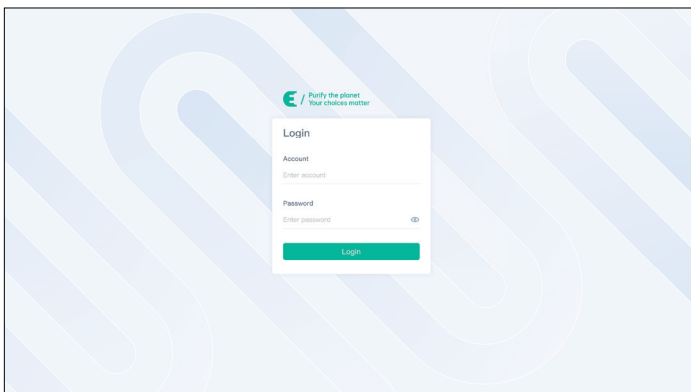


Figure 1 - Login

4. Evcharge Cloud Navigation

Upon logging into Evcharge Cloud, you will be directed to the default home page, as introduced in each part of the page below.

The screenshot shows the Evcharge Cloud dashboard for 'EV FUEL CO., LTD.'. The navigation bar on the left includes: Navigation bar, Data overview, Settings, Bank Account, Employee, Role, and Change Password. The main content area is divided into several sections:

- Operator Information:** Shows 25 Charge Points and 1 Charge Station. Below this is a 'Settings' form with fields for Company Name, Email, Country, City, Location, and a map. A callout points to this section: "The basic information of the operator".
- Account Management:** A table with columns: Account, Role, Add time, and Operation. A callout points to the 'Add time' column: "Create account, you can create multiple accounts and assign them to different people to manage the charge points".
- Role Management:** A table with columns: Role, Member Numbers, Add time, and Operation. A callout points to the 'Add time' column: "Give permissions to the account you created above, with different permissions, the scope of its operations is also different".
- Change Password:** A form with fields for Password, Confirm Password, and a Note. A callout points to this section: "Change the password for logging into Evcharge Cloud".
- Stripe Integration:** A callout points to a link: "Link your Stripe account".

Additional callouts on the right side of the dashboard:

- "The Operator name" points to 'EV FUEL CO., LTD.'
- "The number of charge station and charge point owned by the operator" points to the '25 Charge Points' and '1 Charge Station' indicators.



Our platform is connected to a third-party payment platform Strip for charging payments, so you will need to register for a Stripe account before charging, then fill in the following form:

Link Your Stripe Account

* Currency
EUR

* StripePublicKey
pk_test_51938889F0784y3Chmng6666028710184JG0AIP

* StripePrivateKey
sk_test_51938889F0784y3Chmng6666028710184JG0AIP

* StripeWebhookSecret
whsec_51938889F0784y3Chmng6666028710184JG0AIP

StripeWebhookUrl
https://test.evcharge.com/EvChargeApp/app/v1/Account/v1/StripeWebhookUrl

Buttons: Cancel, Confirm

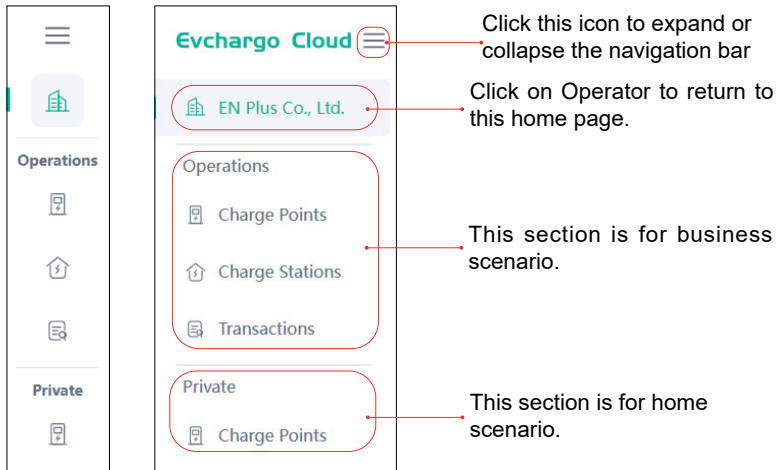


Figure 2 - Evcharge Cloud Navigation

5. Operations

This section is for commercial scenario, and allows you to manage your charge point for business. It includes three sections: **Charge Points**, **Charge Stations** and **Transactions**.

5.1 Charge points

Charge Points section allows you to manage your charge points based on individual charge points only.

You can perform the following operations in this section:

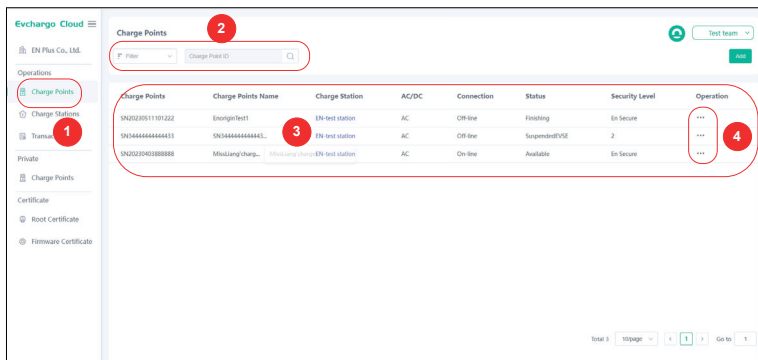


Figure 3 - Charge point (Operation)

- To view the general information of charge points, click on area ①, as shown in Figure 3, you can see the general information of charge points managed by Operator on area ③.
- To locate a charge point, go to area ②, you can filter by the criteria in the drop-down menu, or enter the ID (serial number) of the charge point.
- To set up a charge point, click on **Charge Points** > ... > **Home Page** to set up the charge point, as shown in the Figure 4 - Basic setting (Operation) and Figure 5 - Advanced setting (Operation).

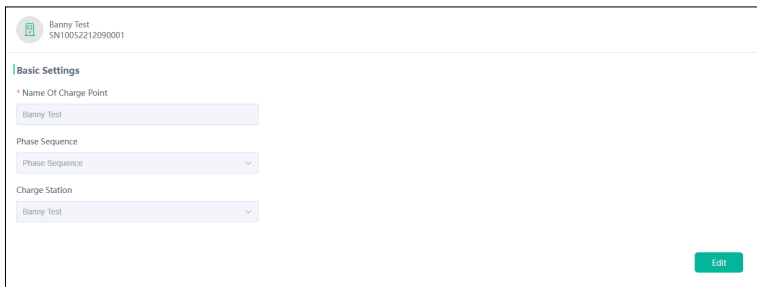


Figure 4 - Basic setting (Operation)

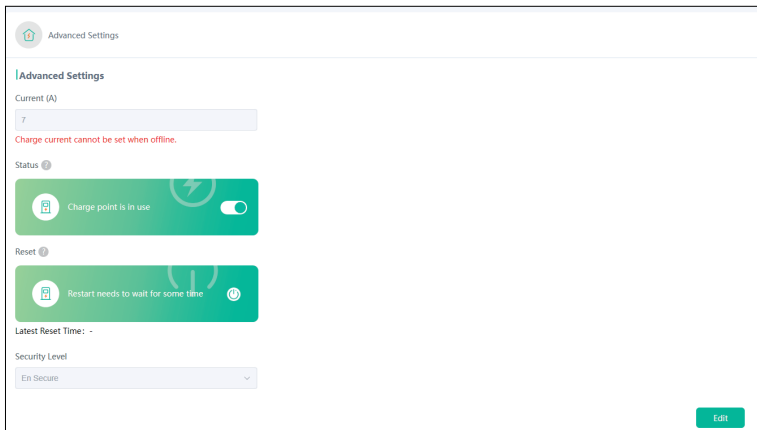


Figure 5 - Advanced setting (Operation)

- To delete a charge point, click on area ④ then click on **Delete** in the drop-down menu to delete the charge point.

- To view the transaction details of a charge point, click on **Charge Points** > **Home Page** and scroll the page to the bottom, as shown in Figure 6 - Charge point transaction (Operation).

Transaction NO.	Charge Stations	Time	Account	Starting Method	Energy	Operation
EnPlus16587620111803473 92	Banny Test	2023-05-17 17:10:56	bannyxu@en-plus.com.cn	APP	0.002 kWh	...
EnPlus16587220136841584 64	EN-test station	2023-05-17 14:32:00	bannyxu@en-plus.com.cn	APP	0.009 kWh	...

Figure 6 - Charge point transaction (Operation)

For further transaction details, such as information on the account, the charge point itself, and the payment, please click on **Home Page** in Figure 6 - Charge point transaction (Operation), then click on **Home Page** that pops up.

Account Details	
Payment Methods	STRIPE
Merchant Account	wei.pan@en-plus.com.cn
Starting Method	APP
Stop Reason	Remote
Charge Point Details	
Charge Point	SN34444444444433
Charge Station	EN-test station
Location	shenzhen
Payment Details	
Energy	0.006 kWh
Electricity Price	100 EUR/kWh
Electricity Tax	0
Total Costs	0.6 EUR

Charging Timeline

- STOP_CHARGE
2023-05-17 10:06:58
- START_CHARGE
2023-05-17 10:06:58

Figure 7 - Transaction details (Operation)

- To add a charge point, click on **Add** button in Figure 3 - Charge point (Operation) and fill out the form as shown in Figure 8 - Add charge point.



You must first create your charge station before you can add a charge point.

Figure 8 - Add charge point

- To view the transaction details of a charge point, click on **Charge Points** > ... > **Home Page** and scroll the page to the bottom, as shown below:

Transaction NO.	Charge Stations	Time	Account	Starting Method	Energy	Operation
EnPlus1656958998006554624	EN-test station	2023-05-12 17:46:24	leilaliang@qq.com	APP	0.15 kWh	...
EnPlus1656958317254238208	EN-test station	2023-05-12 17:43:42	leilaliang@qq.com	APP	0 kWh	...
EnPlus1656954200506183680	EN-test station	2023-05-12 17:27:20	leilaliang@qq.com	APP	0.004 kWh	...

Figure 9 - Charge point transaction (Operation)

- You can locate a specific charge point to view its transaction details by the methods shown in Figure 9 - Charge point transaction (Operation) area **1**.
- To view the further transaction information of a charge point such as account details and payment, click on ... > **Home Page** in Figure 9 - Charge point transaction (Operation).

5.2 Charge stations

Charge Station section allows you to manage your charge points based on the charge points covered by the charge station.

You can perform the following operations in this section:

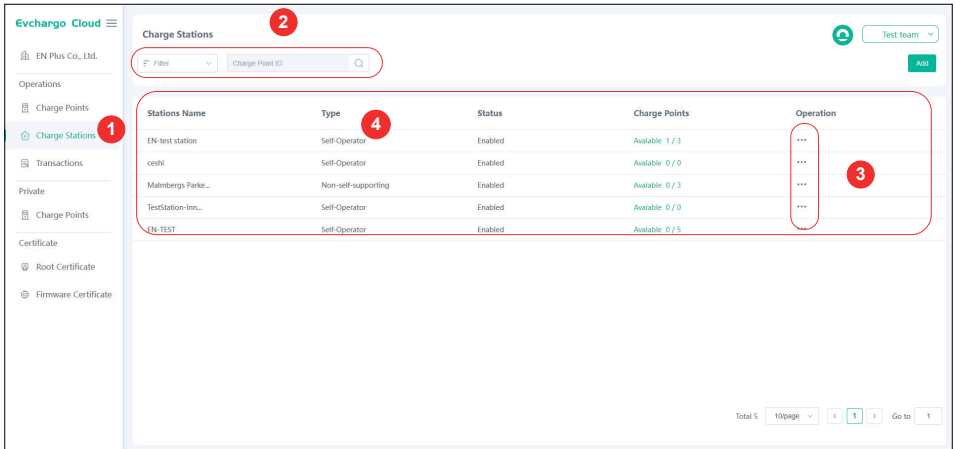


Figure 10 - Charge stations (Operation)

- To locate a charge station, navigate to area **2** and enter the ID (serial number) of the charge point to locate the charge station to which the charge point belongs, or filter by the drop-down criteria.
- To add a charge station, click on **Add** button, then fill out the form as shown below.

Figure 11 - Add charge station



For the Cost, you can set an all-day flat tariff or set time-of-use tariff.

- To delete a charge station, click on **Charge Station** > ... > **Delete**.

- To set up a charge station, click on **Charge Stations** > ... > **Home Page** to enter the following page, and you can set up your charge stations via the following options:

The screenshot shows a web interface titled "Charge Station Homepage" for an "EN-test station". It features a navigation menu with "Charge Point" selected. Below the menu is a search bar for "Charge Point ID". The main content is a table with the following data:

Charge Point	SIM Type	AC/DC	Connection	Status	Operation
EnoriginTest1 SN20230511101222	No SIM	AC	Off-line	Finishing	...
SN34444444444433 SN34444444444433	No SIM	AC	Off-line	SuspendedEVSE	...
Misst.Lang'charger SN20230403888888	No SIM	AC	Off-line	Available	...

Figure 12 - Charge station setting

1) Charge point

You can operate the charge point under your charge station as you can in the **Charge Points** section.

2) Station transactions

You can view the transaction details of your charge station. A charge station controls multiple charge points, so each transaction is actually related to each charge point.

3) General user & VIP

You can divide your user into general user and VIP with different tariff, compared with general user, VIP enjoys a cheaper tariff or even free tariff.

4) Administrator

The administrator is chosen from the accounts you've created and assigned roles to. Click the **Add** button and input the account you want to designate as administrator.

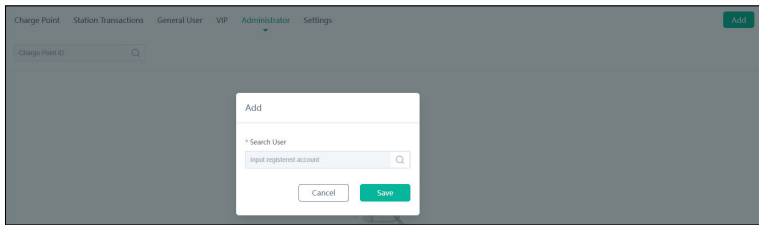


Figure 13 - Administrator

5) Setting

The Setting allows you to set your charge station in four options: Settings, Advanced settings, Load balance and Price setting.

Settings: Set up the basic information of your charge station. As shown in Figure 6 - basic settings:

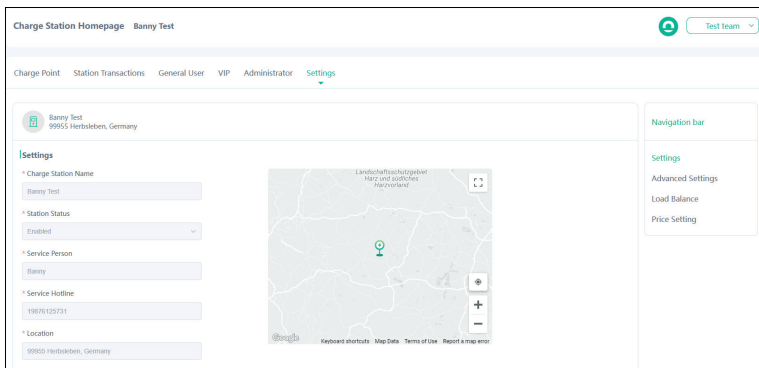


Figure 14 - basic settings

Advanced settings: Allows you to control the availability of the charge station to the user.

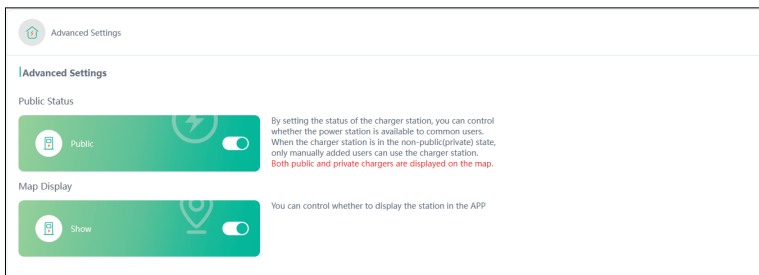


Figure 15 - Advanced settings

Load balance: Allows you to manage the power distributed to your car via the load balance strategy such as power distributed in an average manner or in a first come first served manner. Click on **Edit** button to choose the load balance.

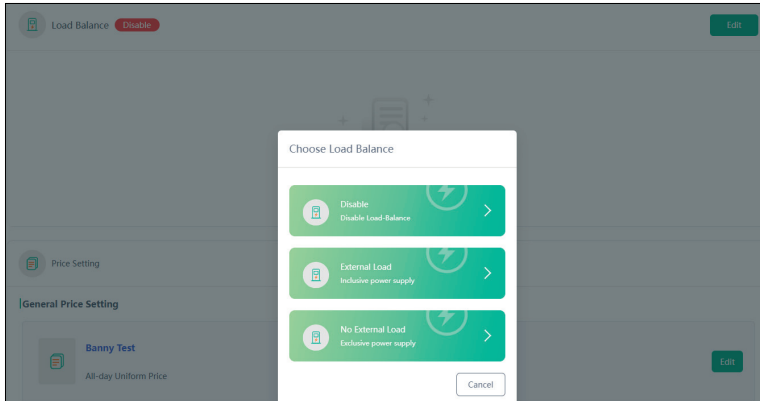


Figure 16 - Choose load balance

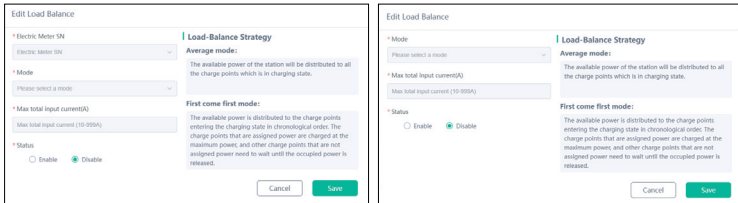


Figure 17 - Edit load balance

Price setting: Allow you set up the price for general user and VIP, the general user is assigned to a flat price, while the vip enjoys a cheaper price or even free.

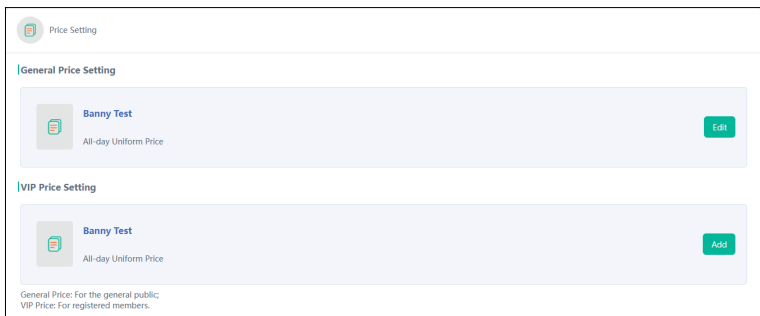


Figure 18 - Price setting

5.3 Transactions

This section shows all of the transactions of all charge stations and charge points.

You can view the transactions by charge station or by charge point.

You can perform the following operations in this section:

Transaction NO.	Account	Charge Points	Charge Stations	Starting Method	Energy	Cost	Time	Operation
ENPlus16569589800654624	leilaliang@qq.com	SN2023051110122 z	EN-test station	APP	0.15 kWh	45 EUR	2023-05-12 17:46:24	...
ENPlus1656958317254238208	leilaliang@qq.com	SN2023051110122 z	EN-test station	APP	0 kWh	0 EUR	2023-05-12 17:43:42	...
ENPlus1656954200506183680	leilaliang@qq.com	SN2023051110122 z	EN-test station	APP	0.004 kWh	1.2 EUR	2023-05-12 17:27:20	...
ENPlus1656950624442593280	leilaliang@qq.com	SN2023051110122 z	EN-test station	APP	0 kWh	0 EUR	2023-05-12 17:13:08	...
ENPlus1656891953343799296	1062710283@qq.com	SN2023040388888	EN-test station	APP	0 kWh	0 EUR	2023-05-12 13:19:59	...
ENPlus16568654119962785792	xiaojiao.liang@en-pl...	SN2023040388888	EN-test station	APP	0.007 kWh	0.7 EUR	2023-05-12 11:34:33	...
ENPlus1656861865818628096	xiaojiao.liang@en-pl...	SN2023040388888	EN-test station	APP	0.003 kWh	0.3 EUR	2023-05-12 11:20:26	...
ENPlus1656861190351134720	xiaojiao.liang@en-pl...	xiaojiao.liang@en-plus.com.cn station	EN-test station	APP	0.001 kWh	0.1 EUR	2023-05-12 11:17:45	...

Figure 19 - Transaction (Operation)

- To see the total information on all transactions, go to area **1** and click on **Transactions**.
- To locate a specific transaction or multiple transactions, go to area **2** to filter by criteria, or to search by date, or search by the charge point ID (serial number).
- To see the details related to the transaction, go to area **3** and click on **...**.

6. Private

This section allows you to have a basic tracking and understanding of the home charge point purchased from you.

You can perform the following operations in this section:

Evcharge Cloud

EN Plus Co., Ltd.

Operations

- Charge Points
- Charge Stations
- Transactions
- Private
 - Charge Points** (1)
 - Root Certificate
 - Firmware Certificate
- Certificate

Charge Points

Filter Charge Point ID (2)

Add Global settings

Charge Points	Account	AC/DC	Connection	Status	Operation
SN20230511101233	xiaojiao.liang@en-plus.com.cn	---	Off-line	---	...
SN10052211040926	790827705@qq.com	---	Off-line	---	...
SN20230403999000	1QA letailiang@qq.com	AC	Off-line	Available	... (3)
SN20230320999001	ting.huang@en-plus.com.cn	AC	Off-line	Available	...

Total 4 10page < 1 > Go to 1

Figure 20 - Charge point (Private)

- To see the general information of the charge point used by the end user, go to area **1**, and click on **Charge Points**.
- To locate a charge point, you can go to area **2** and filter by criteria, or enter the charge point ID (serial number).
- To add a charge point, click on **Add** button and enter the charge point ID (serial number).
- To set up a charge point, go to area **3** and click on **...** > **Home Page** to set up the charge point.
- To delete a charge point, go to area **3** and click on **...** > **Delete** in the drop-down menu to delete the charge point.

7. Support and contact information

Should you have any question, please feel free to contact us:



support@en-plus.com.cn



0086-13392169817

8. Revision history

Revised on	Applicable to platform version	Description
22nd, May, 2023	2.0.0	Initial document creation

1. Instrukcja użytkownika

PL

Evcharge Cloud to inteligentna platforma umożliwiająca efektywne zarządzanie punktami ładowania i stacjami, zapewniająca informacje i pełną kontrolę.

2. Cel tej instrukcji

Celem tego podręcznika jest zapewnienie kompleksowych wskazówek dotyczących efektywnego wykorzystania Evcharge Cloud do zarządzania punktami ładowania i stacjami ładowania. Został zaprojektowany w celu pomocy użytkownikom w łatwym poruszaniu się po funkcjach platformy.


3. Rozpoczęcie pracy

3.1 Logowanie

Po zakupie naszego punktu ładowania otrzymasz e-mail z danymi do konta umożliwiającego dostęp do platformy Evcharge Cloud. Aby zalogować się na platformę, przejdź pod adres <https://cloud.evcharge.com> i wprowadź swoje dane konta oraz hasło.



Konto, które otrzymasz, to konto Administratora, i po zalogowaniu się na platformę za pomocą tego konta, będziesz mógł/mogła tworzyć inne konta i przypisywać im różne poziomy uprawnień poprzez przypisanie ról. Konta, które utworzysz, również będą mogły logować się na platformę, ale z różnymi uprawnieniami funkcjonalnymi.

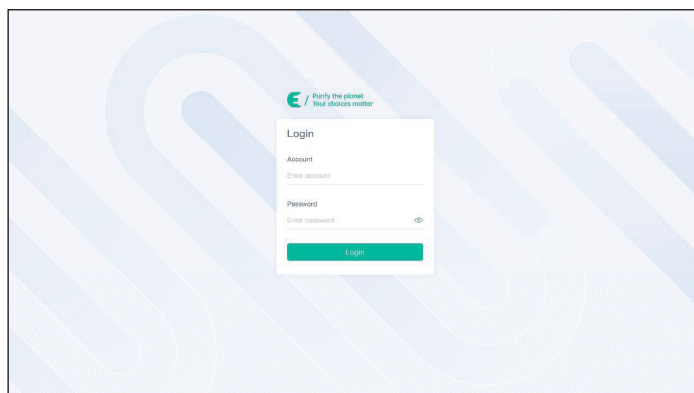

4. Evcharge Cloud Portal

Po zalogowaniu się do Evcharge Cloud, zostaniesz przekierowany/przekierowana do strony głównej, przedstawionej poniżej.

- Navigation bar
- Data overview
- Settings
- Bank Account
- Employee
- Role
- Change Password

The screenshot shows the Evcharge Cloud Portal interface for 'EV-TRAC Co., Ltd.'. At the top, there are statistics for '25 Super Stations' and '1 Charging Point'. Below this is a 'Settings' section with fields for Company Name, City, and a map. A 'Connect Stripe' button is visible. Below the settings is an 'Account' table with columns for Name, Role, Add Date, and Operations. Below that is a 'Role' table with columns for Role, Member Numbers, Add Date, and Operations. At the bottom is a 'Change Password' section with a 'Password' field and a 'Change Password' button.

Nazwa operatora

Liczba stacji ładowania i punkty ładowania należące do operatora

Podstawowe informacje o operatorze

Połączenie swojego konta Stripe

Utwórz konto. Możesz utworzyć wiele kont i przypisać je do różnych osób w celu zarządzania punktami ładowania.

Przydziel uprawnienia do powyższego utworzonego konta, przy różnych uprawnieniach, zakres jego operacji jest również różny.

Zmień hasło do logowania Evcharge Cloud

Kliknij ikonę, aby rozwinąć lub zwinąć pasek nawigacyjny

Kliknij w nazwę operatora, aby powrócić do strony głównej.

Ta sekcja przeznaczona jest do użytku komercyjnego.

Ta sekcja przeznaczona jest do użytku domowego.



Nasza platforma jest połączona z zewnętrzną platformą płatności Stripe w celu obsługi płatności za ładowanie. Zanim przystąpisz do ładowania, będziesz musiał/musiła założyć konto Stripe, a następnie wypełnić poniższy formularz.

Link Your Stripe Account

* Currency
EUR

* StripePublicKey
pk_test_51L69I0mP2hXjlyBIORwmg2dxk56Z4BTSE4UCQdJF

* StripePrivateKey
sk_te*****

* StripeWebhookSecret
whsec*****uZJXG

StripeWebhookUrl
<https://api.evcharge.com/EuChargeApp/app/v1/business/stripe/webhook/ENPlus> Copy

Cancel Confirm

5. Sekcja Operations

Ta sekcja jest przeznaczona dla użytku komercyjnego i umożliwia zarządzanie punktami ładowania w ramach działalności biznesowej. Składa się z trzech sekcji: Punktów ładowania, Stacji ładowania i Transakcji.

5.1. Punkty ładowania (Charge Points)

Sekcja **Charge Points** umożliwia zarządzanie poszczególnymi punktami ładowania przypisanymi do Stacji Ładowania. W tej sekcji możesz wykonywać następujące operacje:

Charge Points	Charge Points Name	Charge Station	AC/DC	Connection	Status	Security Level	Operation
SN2023051101222	EnotginTest1	EN-test station	AC	Off-line	Finishing	En Secure	...
SN34444444444433	SN3444444444443...	EN-test station	AC	Off-line	Suspended/EVSE	2	...
SN20230403888888	MistLiang.charg...	MistLiang.charg EN-test station	AC	On-line	Available	En Secure	...

rys.3

- Aby dodać punkt ładowania, kliknij przycisk Add (rys 3) i wypełnij formularz

Add Charge Point

* Name
Input charge point name

* ID
Enter the charge point ID

* Charge Station
Please select station

* Security Level
En Secure

Cancel Save

rys. 4



Musisz najpierw utworzyć swoją stację ładowania, zanim będziesz mógł/mogła dodać punkt ładowania.

- Aby wyświetlić ogólne informacje o punktach ładowania, kliknij w przycisk Charge Points (1). Możesz zobaczyć ogólne informacje o punktach ładowania zarządzanych przez Operatora (3).
- Aby zlokalizować punkt ładowania, przejdź do obszaru filtrowania (2) , gdzie możesz filtrować według kryteriów w menu rozwijanym lub wpisać identyfikator (numer seryjny) punktu ładowania.
- Aby usunąć punkt ładowania, rozwiń opcje wyboru w kolumnie Operation (4) i wybierz w menu rozwijanym opcje Delete
- Aby skonfigurować punkt ładowania, rozwiń opcje wyboru w kolumnie Operation (4) i wybierz Home Page. Zostaniesz przeniesiony na widok z detalami punktu ładowania

Detale punktu ładowania zawierają trzy sekcje:

- **Basic Settings** - umożliwia zmianę nazwy punktu ładowania, zmianę sekwencji faz, oraz lokalizacji punktu ładowania

Banny Test
SN1052212090001

Basic Settings

Name Of Charge Point
Banny Test

Phase Sequence
Phase Sequence

Charge Station
Banny Test

Edit

- **Advanced Settings** - umożliwia zmianę amperażu, zmianę statusu punktu ładowania, wykonanie resetu stacji.

Advanced Settings

Advanced Settings

Current (A)
7
Charge current cannot be set when offline.

Status
Charge point is in use

Reset
Restart needs to wait for socket table

Latest Reset Time: -

Security Level
En Secure

Edit

- **Charge Points Transactions** - umożliwia przegląd zakończonych sesji ładowania

Transaction NO.	Charge Stations	Time	Account	Starting Method	Energy	Operation
EnPlus16587620111803473 92	Banny Test	2023-05-17 17:10:56	banny.xu@en-plus.com.cn	APP	0.002 kWh	...
EnPlus16587220136841584 64	EN-test station	2023-05-17 14:32:00	banny.xu@en-plus.com.cn	APP	0.009 kWh	...

Aby wyświetlić szczegóły sesji ładowania z kolumny Operations należy wybrać przycisk **Home Page** - zostaniemy przeniesieni do szczegółowych informacji na temat konkretnej sesji ładowania

Account Details	
Payment Methods	STRIPE
Merchant Account	wei.pan@en-plus.com.cn
Starting Method	APP
Stop Reason	Remote
Charge Point Details	
Charge Point	SN34444444444433
Charge Station	EN-test station
Location	shenzhen
Payment Details	
Energy	0.006 kWh
Electricity Price	100 EUR/kWh
Electricity Tax	0
Total Costs	0.6 EUR

Charging Timeline

- STOP_CHARGE
2023-05-11 10:24:28
- START_CHARGE
2023-05-11 10:06:58

5.2. Stacje ładowania (Charge Stations)

Sekcja **Charge Stations** umożliwia zarządzanie punktami ładowania w obrębie **Stacji Ładowania**, do której są przypisane

W tej sekcji możesz wykonywać następujące operacje:

The screenshot shows the 'Evcharge Cloud' interface for managing 'Charge Stations'. The left sidebar contains navigation items: 'EN Plus Co., Ltd.', 'Operations', 'Charge Points', 'Charge Stations' (highlighted with a red circle 1), 'Transactions', 'Private', 'Charge Points', 'Certificate', 'Root Certificate', and 'Firmware Certificate'. The main content area is titled 'Charge Stations' (highlighted with a red circle 2) and features a search bar with 'F. Filter' and 'Charge Point ID' fields. Below the search bar is a table with the following data:

Stations Name	Type	Status	Charge Points	Operation
EN-test station	Self-Operator	Enabled	Available 1 / 3	...
ceshi	Self-Operator	Enabled	Available 0 / 0	...
Malmbergs Parke...	Non-self-supporting	Enabled	Available 0 / 3	...
TestStation-Int...	Self-Operator	Enabled	Available 0 / 0	...
EN-TEST	Self-Operator	Enabled	Available 0 / 5	...

At the bottom right of the table area, there is a pagination control showing 'Total 5', '10page', and 'Go to 1'. A green 'Add' button is located in the top right corner of the main content area.

- Aby dodać stację ładowania, kliknij przycisk **Add**, a następnie wypełnij formularz, zgodnie z poniższym przykładem.

The 'Add Charge Station' form includes the following fields:

- Name:** Input charge station name
- Station Status:** Enabled
- Cost:** Select (with Edit button)
- Service Hotline:** Service Hotline
- Service Person:** Service Person
- Location:** Location

Buttons: Cancel, Save




Dla kosztu można ustawić stałą opłatę przez cały dzień (all-day flat tariff) lub ustawić taryfę w zależności od godzin (time-of-use tariff).




- Aby zlokalizować Stację Ładowania, przejdź do obszaru (2), a następnie wprowadź nazwę stacji ładowania lub skorzystaj z filtrów w menu rozwijanym.
- Aby usunąć Stację Ładowania, rozwiń menu z wiersza Operation i wybierz opcję **Delete**
- Aby skonfigurować Stację Ładowania, rozwiń menu z wiersza Operation i wybierz opcję **Home Page**

5.3. Charge Station Homepage

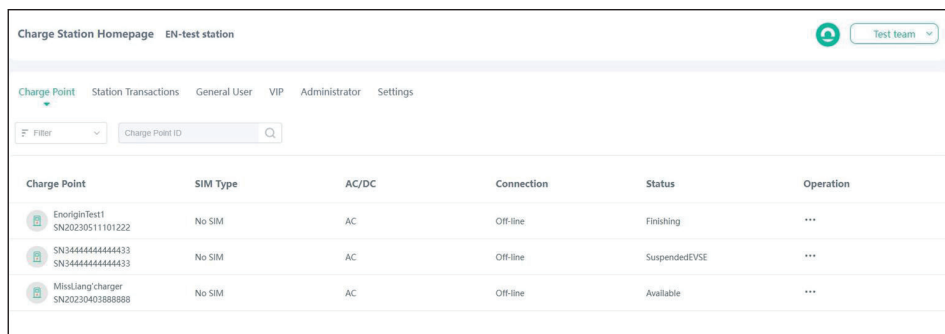Sekcja umożliwiła skonfigurowanie pojedynczej Stacji Ładowania



The screenshot shows the 'Charge Station Homepage' for an 'EN-test station'. The interface includes a navigation menu with 'Charge Point' selected, a search bar for 'Charge Point ID', and a table listing three charge points. Each row in the table includes a 'Charge Point' ID and name, 'SIM Type', 'AC/DC' type, 'Connection' status, 'Status', and 'Operation' options.

Charge Point	SIM Type	AC/DC	Connection	Status	Operation
 EnoriginTest1 SN20230511101222	No SIM	AC	Off-line	Finishing	...
 SN344444444444433 SN344444444444433	No SIM	AC	Off-line	SuspendedEVSE	...
 Mital.Jang's charger SN2123D40386888	No SIM	AC	Off-line	Available	...

- **Punkt ładowania (Charge Point)**

Możesz zarządzać punktem ładowania znajdującym się w ramach twojej stacji ładowania tak samo, jak w sekcji (5.1)

- **Transakcje Stacji Ładowania (Station Transaction)**

Możesz wyświetlić szczegóły transakcji swojej Stacji ładowania. Stacja ładowania kontroluje wiele punktów ładowania, więc każda transakcja jest powiązana z poszczególnymi punktami ładowania.

- **Użytkownik ogólny i VIP (General User, VIP)**

Możesz podzielić swoich użytkowników na użytkowników ogólnych i VIP, z różnymi taryfami. W porównaniu do użytkowników ogólnych, użytkownicy VIP mogą korzystać z tańszej lub darmowej taryfy.

- **Administrator**


Administrator jest wybierany spośród kont, które zostały stworzone i posiadają przypisane role. Kliknij przycisk **Add** i podaj konto, które chcesz wyznaczyć jako administratora.

- **Ustawienia (Settings)**

Umożliwiają dokładne konfigurowanie poszczególnej Stacji Ładowania:


- **Ustawienia (Settings)**

Umożliwia zmianę nazwy Stacji Ładowania, statusu Stacji Ładowania, określenie danych do osoby odpowiadającej za serwis stacji oraz podanie dokładnej lokalizacji Stacji Ładowania

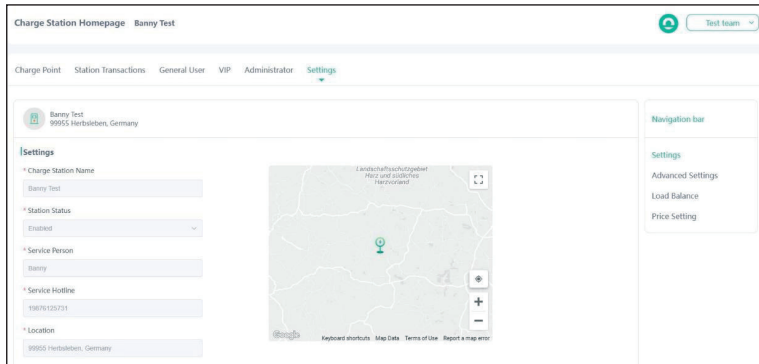




- **Ustawienia zaawansowane (Advanced Settings)**

Pozwalają na kontrolę dostępności stacji ładowania dla użytkownika.

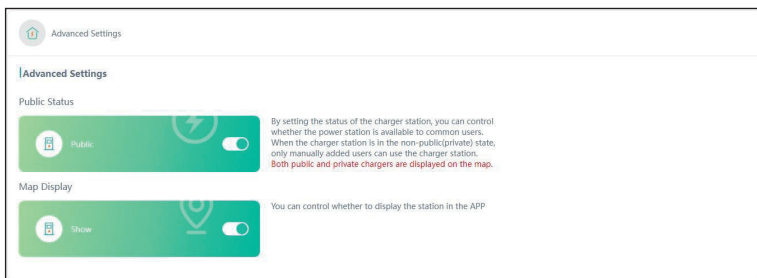


- **Balans obciążenia (Load Balance)**

Pozwala na zarządzanie dostępną mocą przyłącza poprzez strategię balansu obciążenia, taką jak równomierne rozdzielanie mocy lub rozdzielanie mocy według zasady "kto pierwszy, ten lepszy". Kliknij przycisk Edit, aby wybrać sposób rozdzielania mocy.

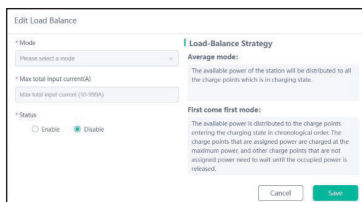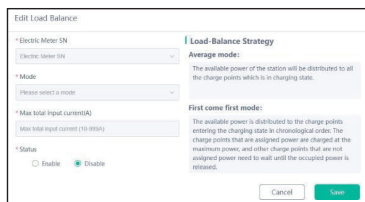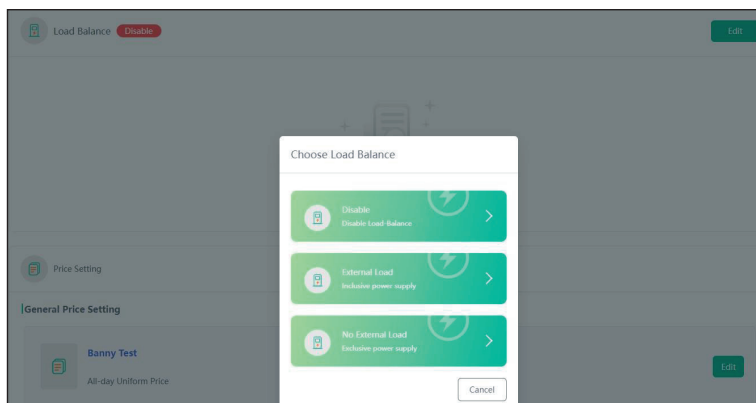

- **Ustawienia cen (Price Setting)**

Pozwala ustawić cenę dla użytkownika ogólnego i VIP. Dla użytkownika ogólnego przypisywana jest stała cena, podczas gdy użytkownik VIP korzysta z niższej ceny lub korzysta z punktu ładowania za darmo.

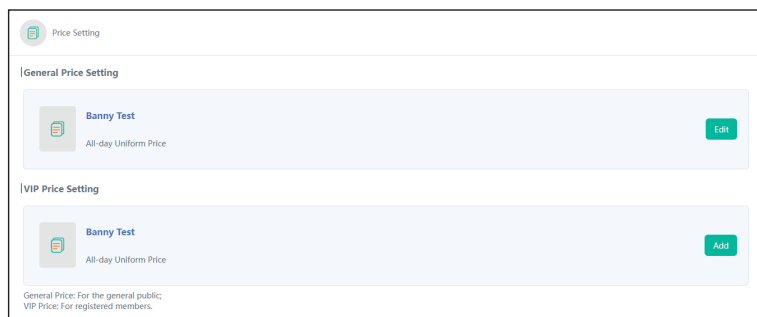

5.4. Transakcje

Ta sekcja wyświetla wszystkie transakcje wszystkich Stacji Ładowania i punktów ładowania. Możesz przeglądać transakcje według stacji ładowania lub punktu ładowania. W tej sekcji możesz wykonać następujące czynności:

Transaction NO.	Account	Charge Points	Charge Stations	Starting Method	Energy	Cost	Time	Operation
EnPlus16569589800654624	leialiang@qq.com	SN2023051110122 Z	EN-test station	APP	0.15 kWh	45 EUR	2023-05-12 17:46:24	...
EnPlus1656958317-54238208	leialiang@qq.com	SN2023051110122 Z	EN-test station	APP	0 kWh	0 EUR	2023-05-12 17:43:42	...
EnPlus1656954200506183680	leialiang@qq.com	SN2023051110122 Z	EN-test station	APP	0.004 kWh	1.2 EUR	2023-05-12 17:27:20	...
EnPlus1656950624442593280	leialiang@qq.com	SN2023051110122 Z	EN-test station	APP	0 kWh	0 EUR	2023-05-12 17:13:08	...
EnPlus1656891953343799296	1062710283@qq.com	SN2023040388888 B	EN-test station	APP	0 kWh	0 EUR	2023-05-12 13:19:59	...
EnPlus1656865419962785792	xiaojiao.liang@en-pl...	SN2023040388888 B	EN-test station	APP	0.007 kWh	0.7 EUR	2023-05-12 11:34:33	...
EnPlus1656861865818628096	xiaojiao.liang@en-pl...	SN2023040388888 B	EN-test station	APP	0.003 kWh	0.3 EUR	2023-05-12 11:20:26	...
EnPlus1656861190351134720	xiaojiao.liang@en-pl...	SN2023040388888 B	EN-test station	APP	0.001 kWh	0.1 EUR	2023-05-12 11:17:45	...

- Aby zobaczyć ogólne informacje dotyczące wszystkich transakcji, przejdź do obszaru (1) i kliknij na Transakcje.
- Aby zlokalizować określoną transakcję lub wiele transakcji, przejdź do obszaru (2), aby filtrować według kryteriów, lub wyszukaj według daty lub ID punktu ładowania (numer seryjny).
- Aby zobaczyć szczegóły dotyczące transakcji, przejdź do obszaru (3) kliknij na trzy kropki i wybierz opcję Home Page.

6. Sekcja Private (prywatne punkty ładowania)

Ta sekcja umożliwia zarządzanie pojedynczymi punktami ładowania bez tworzenia Stacji Ładowania. Pojedyncze punkty ładowania dostępne są także w aplikacji mobilnej EVChargeGo. W tej sekcji możesz wykonać następujące działania:

The screenshot shows the 'Evcharge Cloud' interface. On the left sidebar, 'Charge Points' is highlighted with a red circle and the number 1. At the top of the main content area, there is a search bar with a 'Filter' dropdown and a 'Charge Point ID' input field, both highlighted with a red circle and the number 2. Below this is a table with the following columns: 'Charge Points', 'Account', 'AC/DC', 'Connection', 'Status', and 'Operation'. The table contains four rows of data. The 'Operation' column for the second row is highlighted with a red circle and the number 3, indicating a dropdown menu for actions.

- Aby zobaczyć ogólne informacje dotyczące punktów ładowania, przejdź do obszaru (1), a następnie kliknij na Charge Points.
- Aby zlokalizować punkt ładowania, możesz przejść do obszaru (2) i filtrować według kryteriów lub wpisać ID punktu ładowania (numer seryjny).
- Aby dodać punkt ładowania, kliknij przycisk **Add** i wprowadź ID punktu ładowania (numer seryjny).
- Aby skonfigurować punkt ładowania, kliknij na przycisk **Home Page** dostępny w menu rozwijanym w obszarze (3)
- Aby usunąć punkt ładowania, kliknij na przycisk **Delete** dostępny w menu rozwijanym w obszarze (3)

7. Wsparcie posprzedażowe

W razie jakichkolwiek niejasności bądź pytań, prosimy o kontakt:



serwis@platinet.pl



0048 126510500

Producer: PLATINET S.A.
30-798 Kraków, Sliwiaka 48, PL
www.platinet.eu