

XBOX ONE GAMEPAD 4in1

Compatible with: PS3, PC and Android
2 High Precision Analogue Sticks



USB
UNIVERSAL SERIAL BUS

7m Range

OGPXB1



INTRUDER



USER MANUAL

USER MANUAL

OMEGA VARR "INTRUDER" PC/PS3/XBOX ONE/ANDROID WIRELESS CONTROLLER

Congratulations on purchasing the premium quality Omega Varr series gamepad.

For your personal enjoyment and safety, we recommend that you read this manual thoroughly before using this product and keep this manual handy for reference if needed.


Characteristics:

- Support PC(D-put/X-input)/PS3/Android(X-input)/Xbox one
- 2 High precision analog joysticks to offer 360 degree control
- 2.4GHz Wireless connection via Micro USB dongle
- On/Off switch button for energy saving

- 600mAH Polymer aluminum cell
- More than 20H working time
- Charging cable length: 1M

- 10M connection distance
- Two motors for Double vibration
- 12 buttons with Turbo function

Device overview:

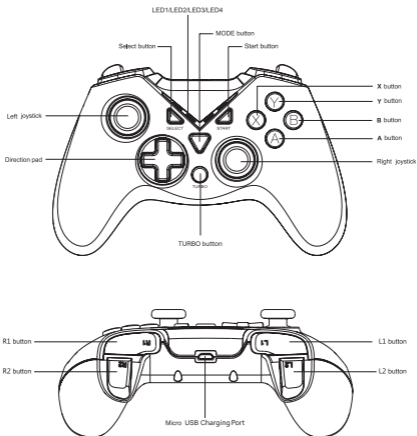

Turbo function:




- To turn on turbo fire, hold the turbo button pressed while pressing the fire buttons.
- To shut down turbo function, hold the turbo button pressed while pressing the fire button you set up.

Vibration:

- The vibration function comes from the driver installed on PC.
- The vibration is automatic on the PS3 and Xbox one.
- Vibration can be set ON/OFF in the game software.

Gamepad Mode Status:

Gamepad must to switch to different mode to support different platform.

Platform	Status	LED Indicator	
PC	DirectInput (Digital/Analog)	1 LED Lighting	
PC	Xinput	2 LED Lighting	
Xbox-One	-	-	LED Lighting depends on gamepad connection in turn
Android	-	1+2 LED Lighting	
PS3	-	-	LED Lighting depends on gamepad connection in turn

- By pressing home button and lasting 5 second,the mode of your controller will be switched among PC D-Input,PC X-input mode and Xbox One mode.
- On Android and PS3 device, plug and play,no need extra operation.
- On PC and D-Input status,gamepad defaults digital mode,quickly press home button to switch to Analog mode,during the operation, LED 1 and LED 2 lighting simultaneously.

Installation on PC:

Compatible with Windows 10/8/7,Vista,2000,Me and Windows98/XP.

- Install vibration driver and X-input driver.(as usual,X-input can be installed automatically on Windows7/8/10,if installation failed,please install by our provided driver).
- Switch the ON/OFF button to start.
- Plug USB receiver into PC USB port of your computer,red LED

keeps lighting and green LED. flashing means that it is researching gamepad status.

- Press gamepad home button, green LED stops blinking, gamepad connected.
- Adjust the gamepad mode to support PC platform based on Chart 1.

On Xbox-One

- Connect gamepad with Xbox One console through USB dongle.
- Switch the ON/OFF button to start.
- Press HOME button for around 5 second.
- It will connect and match XboxOne console automatically.
and the corresponding indicator light (based on the assigned ID number)
will keep on.

On PS3 console

- Connect gamepad with PS3 console through USB dongle.
- Switch the ON/OFF button to start.
- It will connect and match PS3 console automatically.
and the corresponding indicator light (based on the assigned ID number)
will keep on.

On Android Connection (Android tablet/ TV box/Android Phone)

- Connect gamepad with android Box and TV device through USB dongle.
- Switch the ON/OFF button to start.
- When LED1 and LED2 keeps on, the gamepad connects successfully.
- If the controller used on Android phone, you need one OTG cable to connect.

Important:

Gamepad will entry sleep mode automatically if:

- Do not pair to any console after power on for 30 second.
- Under connected mode, after 10mins no operation.
- When gamepad in sleep mode, press Home button to awake it.
- When the power of gamepad is low, four LED blinking. when it is super low, gamepad will shut down automatically.

When no power, gamepad can not work, please charge the gamepad.

Charging:

- If gamepad is under connected status: LED that show the current mode will blink slowly when charging and keep light after full charging.
- If gamepad is under unconnected mode: 4 LEDs will blink slowly when charging and keep light after full charging.

Distributor: **PLATINET S.A.**
30-798 Kraków, Sliwiaka 48, PL
www.platinet.eu

Importator: **PLATINET ELECTRONICS SRL**
077065 CORBEANCA, JUD ILFOV
str. PISCULUI 10A/2, RO
tel.: 0 742 233 799, officero@platinet.eu
www.platinet.eu



omega



RoHS

Dla Xbox-One

- Podłącz kontroler do konsoli używając dołączonego adaptera USB.
- Włącz używając przycisku ON/OFF
- Wcisnij przycisk home przez około 5 sekund, połączenie zostanie nawiązane automatycznie.

Dla konsoli PS3

- Podłącz kontroler do konsoli używając adaptera USB.
- Włącz używając przycisku ON/OFF
- Połączenie nastąpi automatycznie

Dla Android Android (Android tablet/ TV box/Android Phone)

- Podłącz do android Box lub TV device przez adapter USB.
- Włącz używając przycisku ON/OFF.
- Kiedy LED1 I LED2 będą się świecić wspólnie, urządzenie połączyło się automatycznie
- Aby podłączyć kontroler do telefonu android użyj kabla OTG.

Ważne

Gamepad przejdzie automatycznie w tryb czuwania jeżeli:

- Nie zostanie sparowany przez 30 sekund od włączenia z konsolą.
- Po 10 minutach w czasie podłączenia jeżeli nie jest używany
- Aby wyjść z trybu czuwania wciśnij przycisk home.
- Przy niskim poziomie baterii wszystkie 4 diody będą mrugać, po wyczerpaniu baterii urządzenie wyłączy się.
- Po rozładowaniu baterii podłącz gamepad do ładowania używając kabla USB z zestawu.

Ładowanie

- W czasie ładowania dioda led pokazująca status trybu pracy będzie migać, po całkowitym naładowaniu przestanie migać i będzie świecić stałym światłem. Pełne ładowanie będzie trwać do kilku godzin w zależności od stopnia rozładowania.

Distributor: **PLATINET S.A.**
30-798 Kraków, Sliwiaka 48, PL
www.platinet.eu

Importator: **PLATINET ELECTRONICS SRL**
077065 CORBEANCA, JUD ILFOV
str. PISCULUI 10A/2, RO
tel.: 0 742 233 799, officero@platinet.eu
www.platinet.eu



omega



RoHS